

Antriebstechnik

Eller GmbH

Tel.: +49 (0)2801- 7749920

Fax: +49 (0)2801- 7749925

Email: info@euba.de

Company:

Street:

City:

Country:

Phone:

Fax:

Contact person:


Regulating power dynamical:

Pressure force: kN

Tensile force: kN

Static stress: kN

Fitting position:

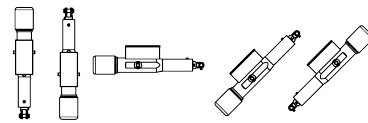

Stroke: mm
Velocity: mm/s

Operating frequency: s/h
Cyclic duration factor: % ED

Type of mounting:

bracket	pivot	clevis and bold
cardan joint	flange	swivel head
angle ball+socket joint	special fixing (on request)	

Ambient conditions:

dusty
humid
tropical
sea surrounding

Installation:

outdoors
covered
closed room
meter above sea level

Specification:

high rust protection
special coating
bellow

Connection voltage: 1AC V Hz DC V
3AC / V Hz

Type of protection: IP- **Ambient temperature:** °C to °C
Insulation class:

Limit switches:

2 4 6 adjustable limit switches
potentiometer Ω special design (on request)
electronic position 0/4 - 20 mA transmitter

Special design:

PTC thermistor	brake motor	anti-condensation heater
switch box heater	plug connection	