Inquiry form

Antriebstechnik
Eller Gmbh
Phone: +49 (0)2801- 7749920
Email: info@euba.de

Company:
Street:
City:
Country:
Phone:
Contact person:

Regulating power dynamical:

Pressure force: kN
Tensile force: kN
static stress: kN

Fitting position:

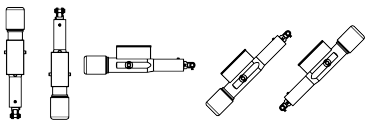

☐ ☐ ☐ ☐ ☐

Stroke: mm
Velocity: mm/s

Operating frequency: s/h
Cyclic duration factor: % ED

Type of mounting:

☐ bracket ☐ pivot ☐ clevis and bold
☐ cardan joint ☐ flange ☐ swivel head
☐ angle ball+socket joint ☐ special fixing (on request)

Ambient conditions:

☐ dusty
☐ humid
☐ tropical
☐ sea surrounding

Installation:

☐ outdoors
☐ covered
☐ closed room
meter above sea level

Specification:

☐ high rust protection
☐ special coating
☐ bellow

Connection voltage: 1AC V Hz DC V
3AC / V Hz

Type of protection: IP- **Ambient temperature:** °C to °C
Insulation class:

Limit switches:

☐ 2 ☐ 4 ☐ 6 adjustable limit switches
☐ potentiometer **Ω** ☐ special design (on request)
☐ electronic position 0/4 - 20 mA transmitter

Special design:

☐ PTC thermistor ☐ brake motor ☐ anti-condensation heater
☐ switch box heater ☐ plug connection